

### Diameters

Outside: 116mm maximum

Inside: 17mm minimum

### Text

Normal: 6 point, minimum

Bold: 12 point, minimum

Reverse: 12 point, minimum

### Graphics

Lines: 0.5 point, minimum

Reverse: 2 point, minimum

### Screens

100 lines or 40 lines/cm

60% maximum, 15% minimum

### Other Requirements

Registration Marks: 90 degrees outside of label area

Compact Disc Data Storage Logo: 15mm (9/16") minimum

### Label Film

Color Separated, 1 film per color

Positive right reading

Full dark emulsion. Emulsion-side up

.1 mm (.004") maximum thickness

7 7/8" square, minimum



### Colors

All PMS (Pantone Matching System) colors are available, except fluorescent and Day-Glo colors. Labels are printed with two colors at no extra charge. Three and four color printing is available with an additional charge. Pantone is a registered trademark of Pantone, Inc.

Note: Any label copy received that does not conform to our specs, will either be returned or brought to spec at customer's expense.

### RECOMMENDATIONS

- CD-R and 4mm tape are the preferred input media for images ready for mastering.
- Use new tapes of good quality.
- Have label film produced by CD-ROM facility.
- Provide a duplicate set of tapes.
- To avoid accidental erasure, please write protect your input before sending it to us.
- In the DOS environment, limit the number of files per subdirectory to 250 to avoid performance degradation.

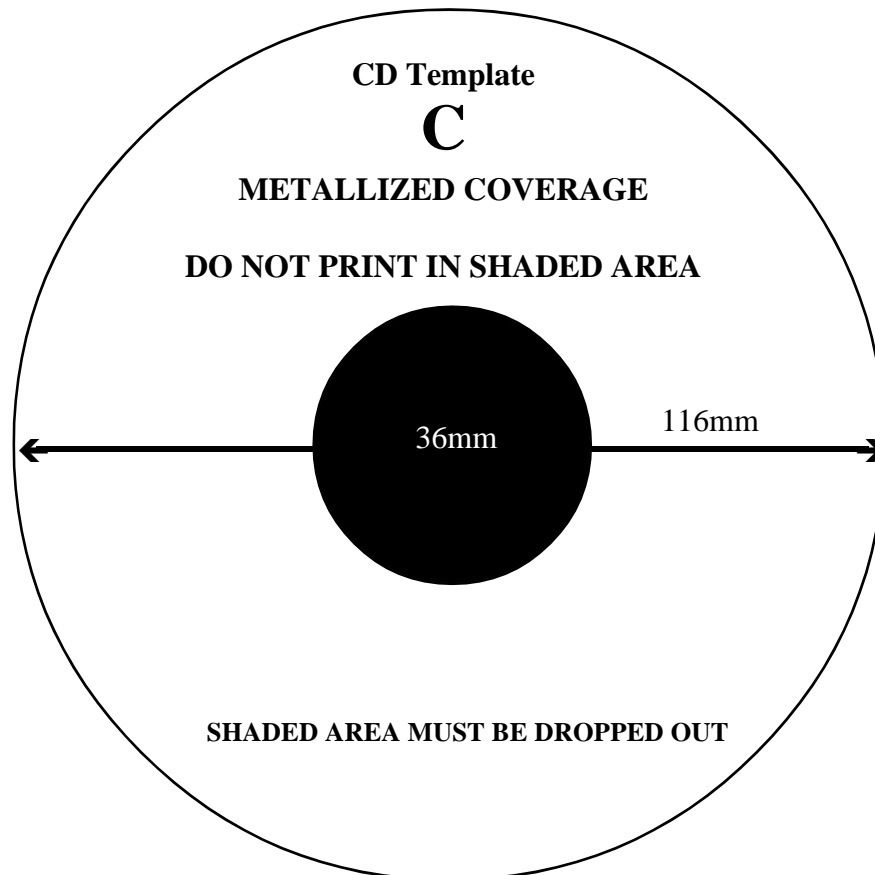

### Diameters

Outside: 116mm maximum

Inside: 36mm minimum

### Text

Normal: 6 point, minimum

Bold: 12 point, minimum

Reverse: 12 point, minimum

### Graphics

Lines: 0.5 point, minimum

Reverse: 2 point, minimum

### Screens

100 lines or 40 lines cm

60% maximum, 15% minimum

### Other Requirements

Registration Marks: 90 degrees outside of label area

Compact Disc Data Storage Logo: 15mm (9/16") minimum

### Label Film

Color Separated, 1 film per color

Positive right reading

Full dark emulsion. Emulsion-side up

.1 mm (.004") maximum thickness

7 7/8" square, minimum



### Colors

All PMS (Pantone Matching System) colors are available, except fluorescent and Day-Glo colors. Labels are printed with two colors at no extra charge. Three and four color printing is available with an additional charge. Pantone is a registered trademark of Pantone, Inc.

Note: Any label copy received that does not conform to our specs, will either be returned or brought to spec at customer's expense.

### RECOMMENDATIONS

- CD-R and 4mm tape are the preferred input media for images ready for mastering.
- Use new tapes of good quality.
- Have label film produced by CD-ROM facility.
- Provide a duplicate set of tapes.
- To avoid accidental erasure, please write protect your input before sending it to us.
- In the DOS environment, limit the number of files per subdirectory to 250 to avoid performance degradation.

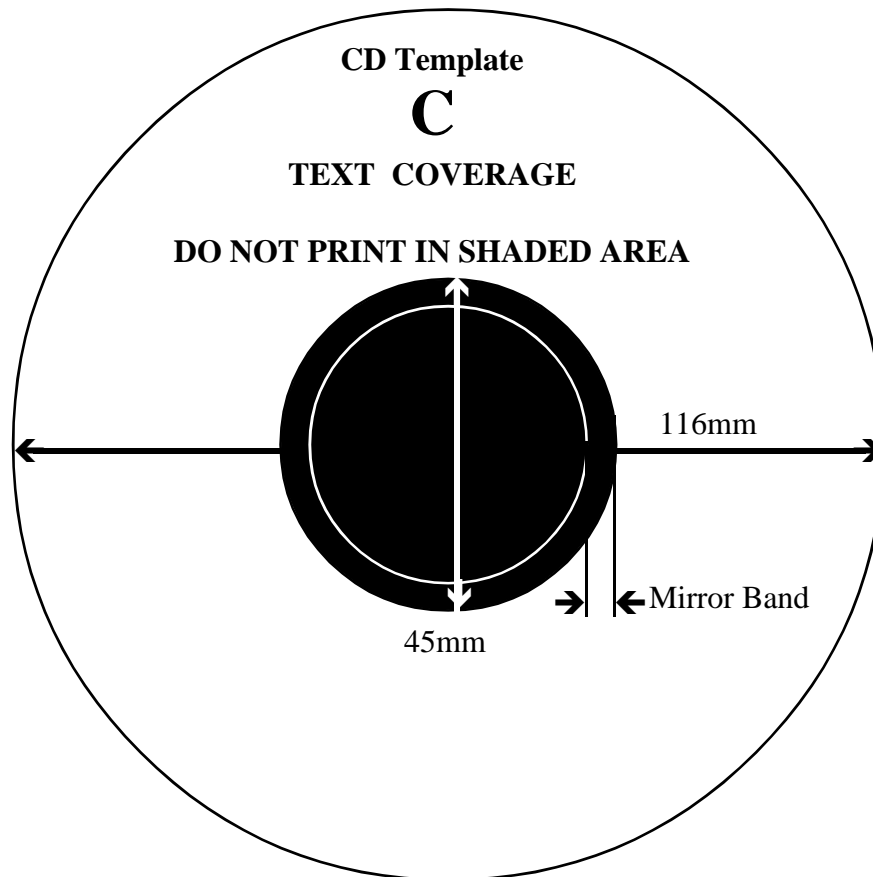

### **Diameters**

Outside: 117mm maximum

Inside: 45mm minimum

### **Text**

Normal: 6 point, minimum

Bold: 12 point, minimum

Reverse: 12 point, minimum

### **Graphics**

Lines: 0.5 point, minimum

Reverse: 2 point, minimum

### **Screens**

85 lines

60% maximum, 15% minimum

### **Other Requirements**

Registration Marks: 90 degrees outside of label area

Compact Disc Data Storage Logo: 15mm (9/16") minimum

### **Label Film**

Color Separated, 1 film per color

Positive right reading

Full dark emulsion. Emulsion-side up

.1 mm (.004") maximum thickness

7 7/8" square, minimum

### **Colors**

All PMS (Pantone Matching System) colors are available, except fluorescent and Day-Glo colors. Labels are printed with two colors at no extra charge. Three and four color printing is available with an additional charge. Pantone is a registered trademark of Pantone, Inc.

Note: Any label copy received that does not conform to our specs, will either be returned or brought to spec at customer's expense.

### **RECOMMENDATIONS**

- CD-R and 4mm tape are the preferred input media for images ready for mastering.
- Use new tapes of good quality.
- Have label film produced by CD-ROM facility.
- Provide a duplicate set of tapes.
- To avoid accidental erasure, please write protect your input before sending it to us.
- In the DOS environment, limit the number of files per subdirectory to 250 to avoid performance degradation.